
SK 55 TAA

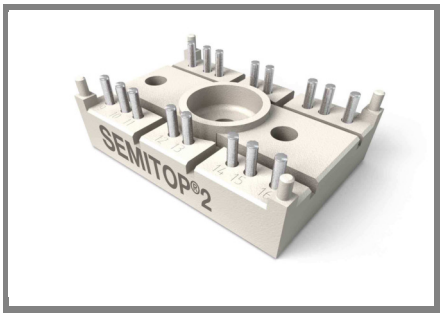

SEMITOP®2

Two separated thyristors

SK 55 TAA

Target Data

Features


- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DBC)
- Glass passivated thyristor chips
- Up to 1600 reverse voltage
- High surge currents

Typical Applications*

- Brake chopper
- Soft starters

V_{RSM} V	V_{RRM}, V_{DRM} V	I_T= 55 A (T_s = 80 °C)
900	800	SK55TAA08
1300	1200	SK55TAA12
1700	1600	SK55TAA16

Characteristics		Ts = 25°C unless otherwise specified	
Symbol	**Conditions**	**Values**	**Units**
I_T	Ts = 100°C	36	A
I_T	Ts = 80°C	55	A
			A
I_{TSM}/I_{FSM}	T_{vj} = 25 (125) °C; 10 ms	1000 (900)	A
I^2t	T_{vj} = 25 (125) °C; half sine wave, 10 ms	5000 (4000)	A^2s
T_{stg}		-40 ... + 125	°C
T_{solder}	terminals, 10 s	260	°C
Thyristor			
$(dv/dt)_{cr}$	T_{vj} = 125 °C	1000	V/µs
$(di/dt)_{cr}$	T_{vj} = 125 °C; f = 50 ... 60 Hz	50	A/µs
t_q	T_{vj} = 125 °C; typ.	80	µs
I_H	T_{vj} = 25 °C; typ. / max.	100 / 200	mA
I_L	T_{vj} = 25 °C; R_G = 33 Ω ; typ. / max.	200 / 500	mA
V_T	T_{vj} = 25 °C; (I_T = 80 A); max.	1,2	V
$V_{T(TO)}$	T_{vj} = 125 °C	max. 0,85	V
r_T	T_{vj} = 125 °C	max. 5,7	mΩ
I_{DD}; I_{RD}	T_{vj} = 125 °C; V_{DD} = V_{DRM}; V_{RD} = V_{RRM}	max. 15	mA
$R_{th(j-s)}$	cont. per thyristor	0,8	K/W
T_{vj}		-40 ... +130	°C
V_{GT}	T_{vj} = 25 °C; d.c.	2	V
I_{GT}	T_{vj} = 25 °C; d.c.	100	mA
V_{GD}	T_{vj} = 125 °C; d.c.	0,25	V
I_{GD}	T_{vj} = 125 °C; d.c.	5	mA
Diode			
V_F	T_{vj} = °C; (I_F = A); max.		V
$V_{(TO)}$	T_{vj} = °C		V
r_T	T_{vj} = °C		mΩ
I_{RD}	T_{vj} = °C; V_{RD} = V_{RRM}		mA
$R_{th(j-s)}$			K/W
T_{vj}			°C
Mechanical data			
V_{isol}	AC 50Hz, r.m.s. 1min (1sec)	2500 (3000)	V
M_1	mounting torque	2	Nm
w		19	g
Case	SEMITOP®2	T 81	



TAA

 © by SEMIKRON

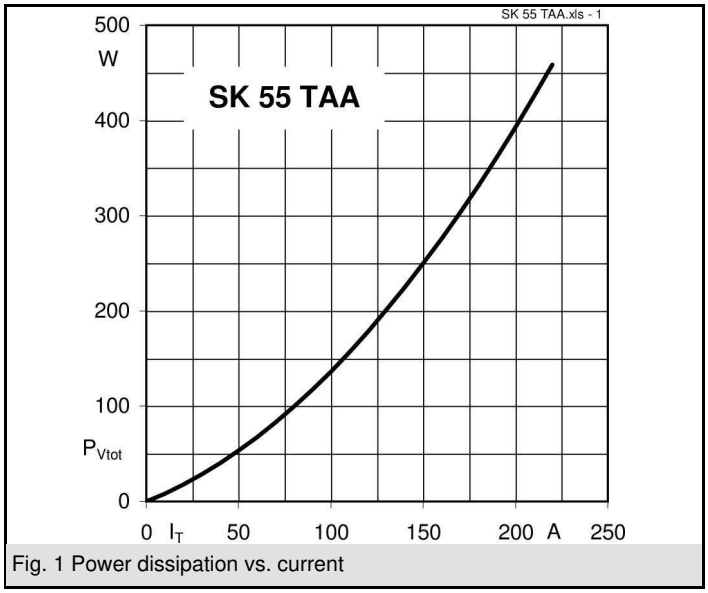


Fig. 1 Power dissipation vs. current

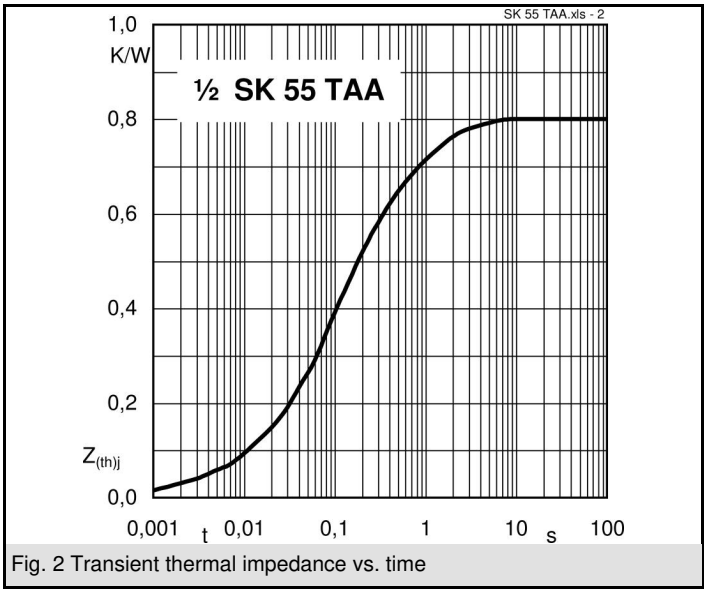


Fig. 2 Transient thermal impedance vs. time

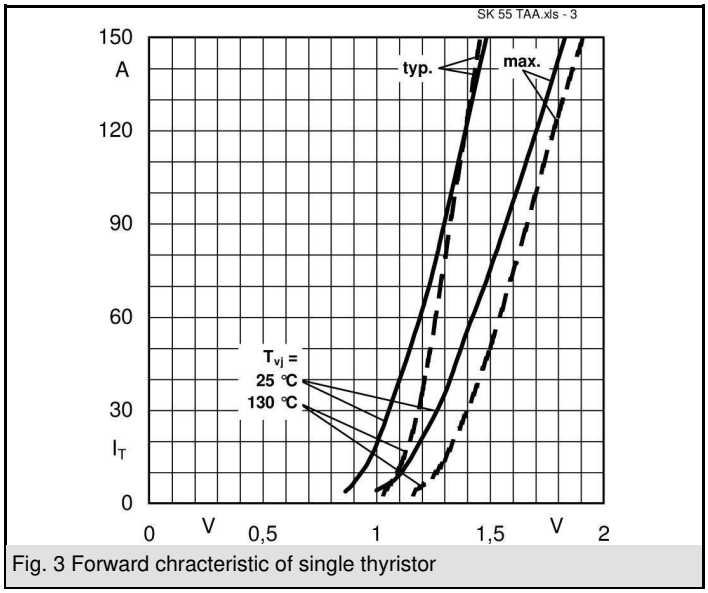


Fig. 3 Forward chracteristic of single thyristor

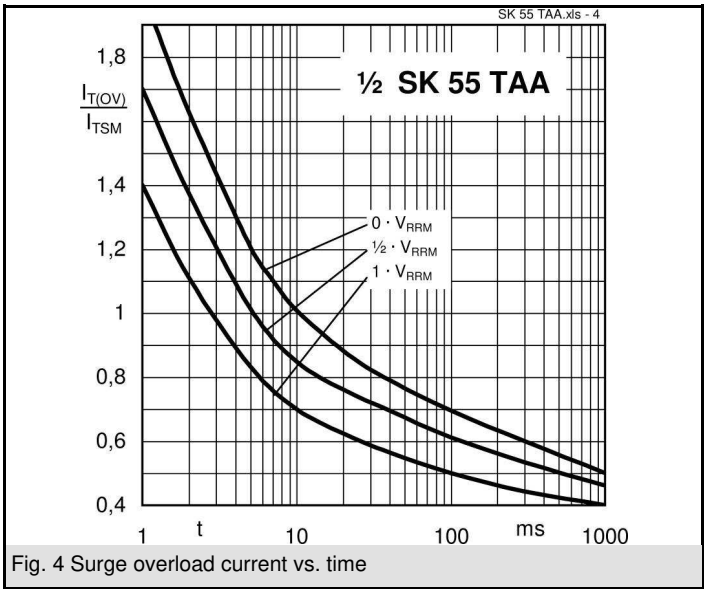


Fig. 4 Surge overload current vs. time


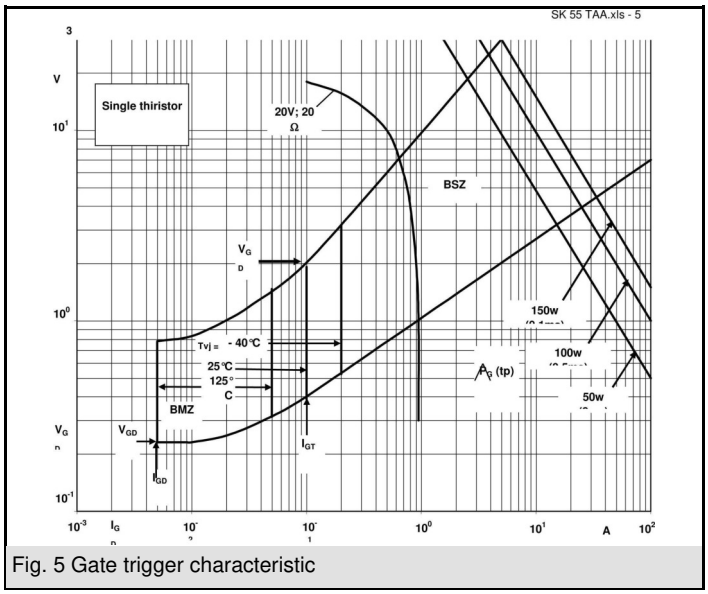


Fig. 5 Gate trigger characteristic

 © by SEMIKRON


SK 55 TAA

Dimensions in mm

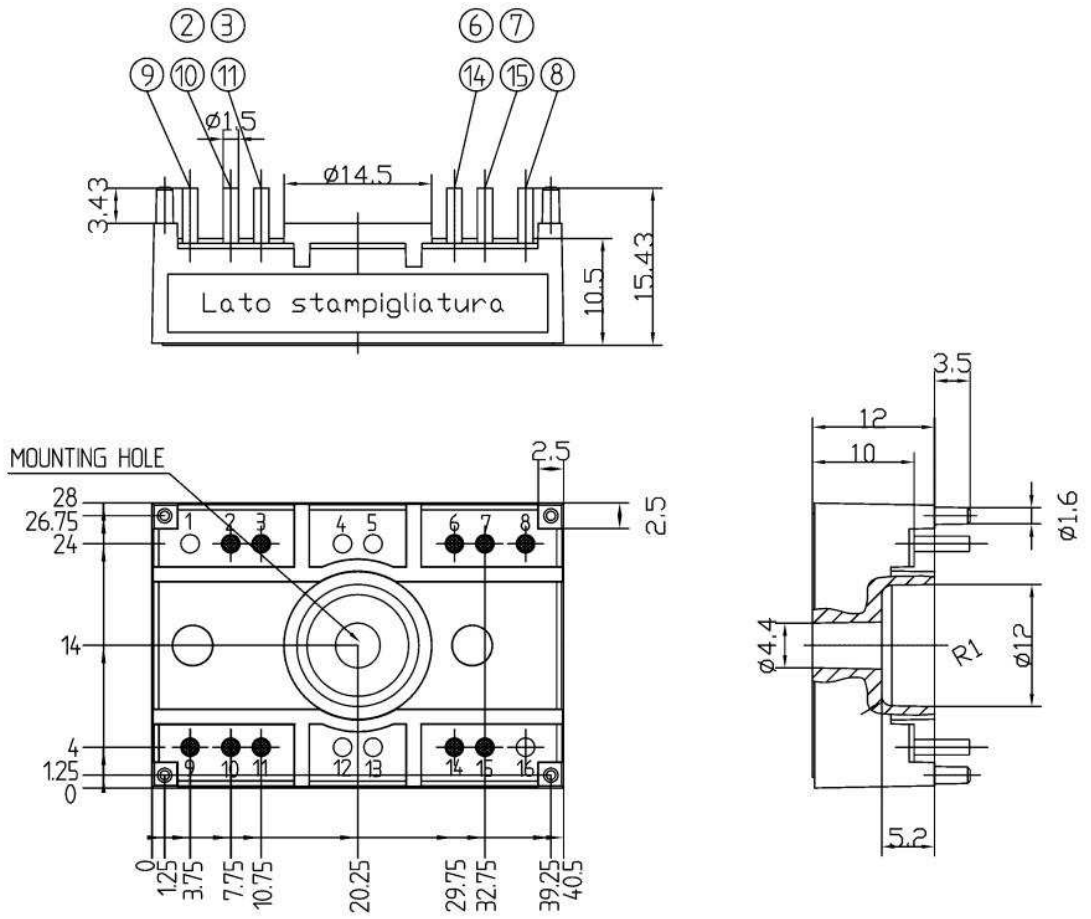

SUGGESTED HOLEDIAMETER FOR THE SOLDER PINS AND THE MOUNTING PINS IN THE PCB: 2 mm

Case T 81 (Suggested hole diameter, in the PCB, for solder pins and plastic mounting pins: 2mm)



TAA

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

 © by SEMIKRON